


## AIO OVERHEAD SHOWER CP

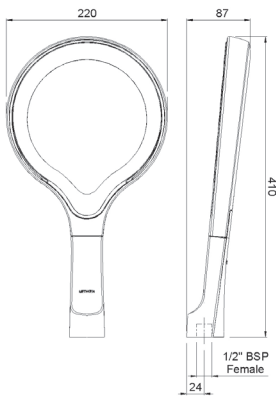

**CONSTRUCTION:** ABS

**SUPPLY:** Suitable For High Pressure Systems

**INLET CONNECTIONS:** 1/2" BSP

**WORKING PRESSURES:** 1.0 - 5.0 bar

**CARTRIDGE/VALVE TYPE:** N/A

- Limescale Resistant - Hydrophobic Properties Resists The Build Up Of Limescale
- Water Efficient Without Compromising Performance
- Rotary Ceramic Diverter Cartridge For Smooth Operation
- Quick Fit Connector For Easy Installation
- Comes Complete With 15Mm (1/2" Bsp) Threaded Connection
- Fitted With 12 L/Min Flow Regulator
- Twin With A Kaha Or Kiri Single Outlet Shower Valve

### AOOSCPUK

#### Open Outlet Flow (Bar - l/min)

BAR	0.3	0.5	1.0	2.0	3.0	4.0	5.0
HANSET FLOW	5.5	7.2	9.9	11.4	11.6	11.6	11.1

### Chrome



2009723



2105800



Please Note: Flow rate will be dictated by installation configurations.  
Please ensure to check the appropriate flow restrictor information if applicable.  
\*Please refer to website for full warranty details.

**FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM**

[methven.com](http://methven.com)

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.