


## AVOCA BATH FILLER

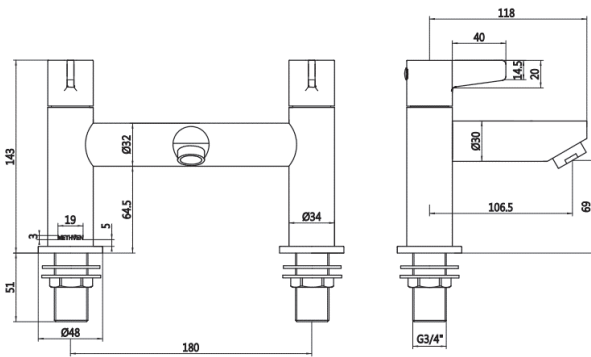

**CONSTRUCTION:** Brass

**CARTRIDGE/VALVE TYPE:** 1/4 Turn Ceramic Disc

**SUPPLY:** Suitable For Low Pressure Systems

**INLET CONNECTIONS:** 3/4" BSP

**WORKING PRESSURES:** 0.1 - 5.0 bar

**OPERATION:** Separate Handles For Hot & Cold Control

- 1/4 Turn Ceramic Disc Handles Ensure A Smooth Operation And Longer Life
- Separate Hot And Cold Supply
- 180mm Standard Bath Centres
- Easy Use Paddle Levers
- Brass Back Nuts for Added Durability
- Co-ordinating Avoca Products

AVBFCP

Chrome

### Open Outlet Flow (Bar - l/min)

BAR	0.1	0.3	0.5	1.0	2.0	3.0	4.0	5.0
<b>SPOUT FLOW</b>	6.8	10.7	14.4	20.9	30.1	37.1	43.1	48.4



2207353



Please Note: Flow rate will be dictated by installation configurations.  
Please ensure to check the appropriate flow restrictor information if applicable.  
\*Please refer to website for full warranty details.

**FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM**

[methven.com](http://methven.com)

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.