


## KIRI COOL TO TOUCH BAR SHOWER WITH DIVERTER

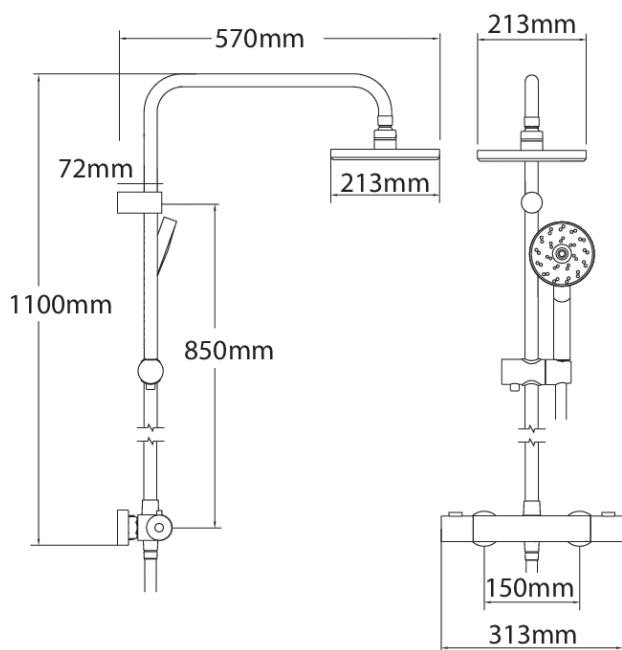

**CONSTRUCTION:** Brass & ABS

**CARTRIDGE/VALVE TYPE:** Thermostatic

**SUPPLY:** Suitable For High Pressure Systems

**INLET CONNECTIONS:** 15mm Compression

**WORKING PRESSURES:** 1.5 - 5.0 bar

**OPERATION:** Separate Flow And Temperature Controls

- Safe cool to touch body
- 38°C temperature hot stop with override facility
- Satinjet® fixed head and handset supplied with 9 l/min flow regulator
- Includes easy fit connections
- Smooth easy clean 1.5m hose
- Diverter to two outlets
- Lifetime Warranty on handset

### KCTSDEF

#### Open Outlet Flow (Bar - l/min)

BAR	0.3	0.5	1.0	2.0	3.0	4.0	5.0
HANDSET FLOW	8.6	10.1	9	9	9	9	9
OVERHEAD FLOW	7	10.16	9	9	9	9	9

### Chrome & Graphite



2201736



2204348



2201736

Please Note: Flow rate will be dictated by installation configurations.

Please ensure to check the appropriate flow restrictor information if applicable.

\*Please refer to website for full warranty details.

**FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM**

**methven.com**

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.